

FDR-X

XF-88

XC-89

A large, light gray, stylized 'X' graphic that serves as a background for the lower half of the cover. It has a thick, rounded stroke and is centered on the page.

Owner's Manual

FOR-X

XF-88 SPECIFICATIONS

3.5" Center FullRange Speaker

PP Cone with Rubber Edge

0.75" [ø20mm] KSV Voice Coil

Frequency Response : 125~20000Hz

Sensitivity : 83dB/w/m

Impedance : 4 Ohm

Rated Power : 50W

Max. Power : 100W



FOR-X

XC-89 SPECIFICATIONS

3.5" Center Coaxial Speaker

Fiberglass Ketone Body Rubber Edge

0.8" [Φ20.4mm] ASV Voice Coil

Φ28mm PEI Balance Dome Tweeter

Frequency Response : 102~20000Hz

Sensitivity : 84dB/w/m

Impedance : 4 Ohm


Rated Power : 50W

Max. Power : 100W




Component Set

Model XF-88

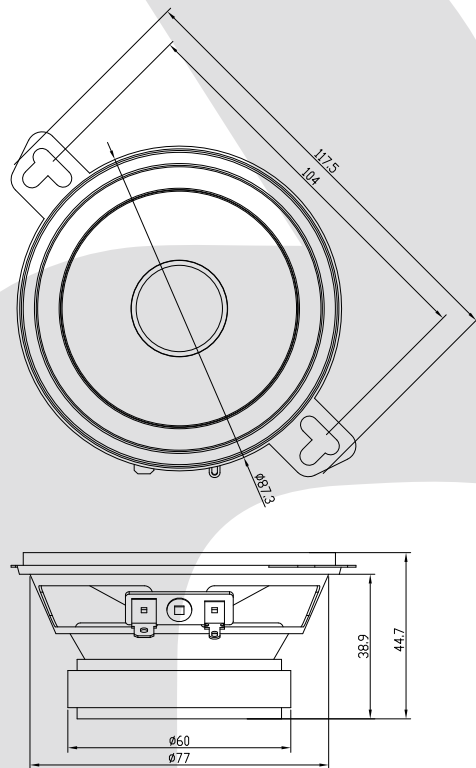


Model XC-89

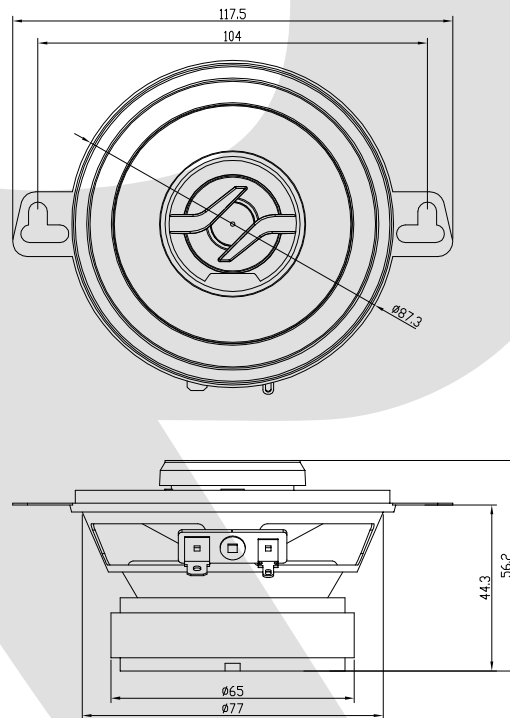


Coaxial Speaker

Model XF-88


1. Punching

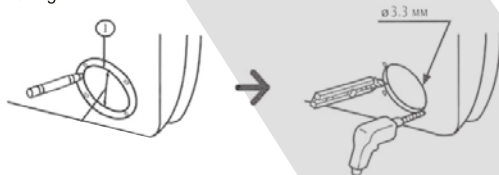

2. Wiring diagram

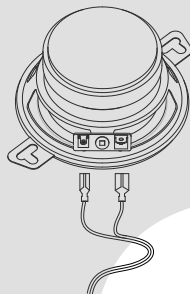


3. Mounting

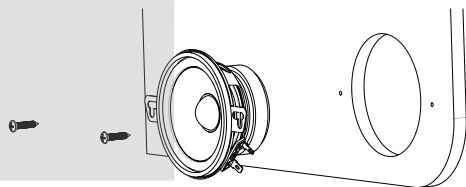


I Model XC-89

1. Mark the four bolt holes and make them 3,3mm in diameter.

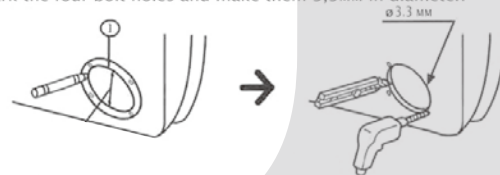

2. Wiring diagram

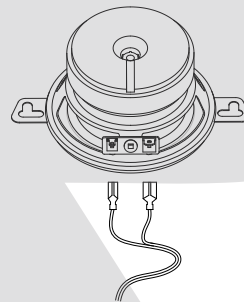

3. Mounting

