

XMD-1616

6.5"

Midrange Speaker



General Specifications

Overall Dimensions	mm	168*75
RMS POWER	W	100
MAX POWER	W	200
Sensitivity	dB	90.5
Frequency Response	Hz	125-10K
Voice Coil Diameter	mm	25.9
Nominal Impedance	ohms	4
DC Resistance	ohms	3.4
Magnet size & material	Neodymium, 2.7 Oz	
Basket material	Stamped Steel Basket	
Coil Material	CCAW	
Former material	Kapton	
Cone Material	Fiberglass	
Surround material	cloth	
Voice coil winding height	mm	8.2
Gap height	mm	5
Xmax	mm	1.6
BL Product	N.A	5.6
Net weight	kg	0.55


- 1.FEM simulation motor structure, provide low distortion and highly motor efficiency
- 2.Paper cone composite glass fiber
3. 1" voice coil with ccaw wire, for high efficiency

T-S Parameters

Fs	Hz	125
Mms	g	13.6
Cms	mm/N	0.14
Qms		6.32
Qes		0.96
Qts		0.91
Vas	L	2.1
Sd	m ²	132.7
No	%	1.1

All specifications subject to change without notice!

Dimensions

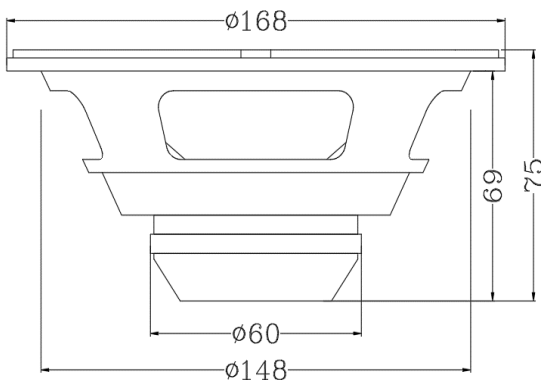

Frequency

