


Android Audio Power Amplifier

FOR-X

XQ-75.4A

INSTRUCTION MANUAL

CONNECTIONS & WINING

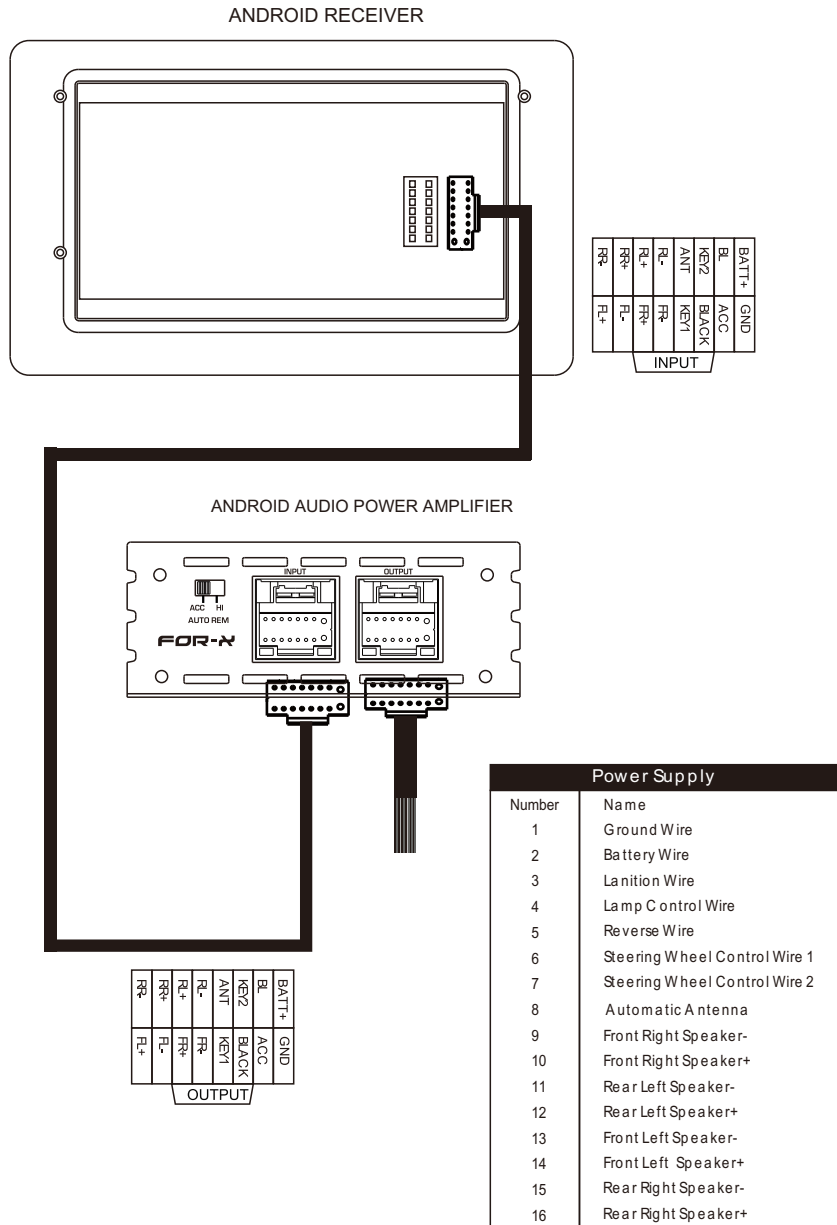

INTRODUCTION


ACCESSORY LIST

1. User Manual	1pc
2. Amplifier	1pc
3. Conncetion line(L=300mm)	1pcs

SPECIFIATIONS

N-power Output@4Ω	75Wx4
Max power	150Wx4
T.H.D	≤ 0.1%
Frequency Response	20Hz-20kHz
Signal To Noise Ratio +A	91dB
Sensitivity	0.15V-8V
High/Bass Boost	-9dB~+9dB
Unit Dimensions(LxHxW)	175x115x45mm

PANEL CONTROLS AND FEATURES

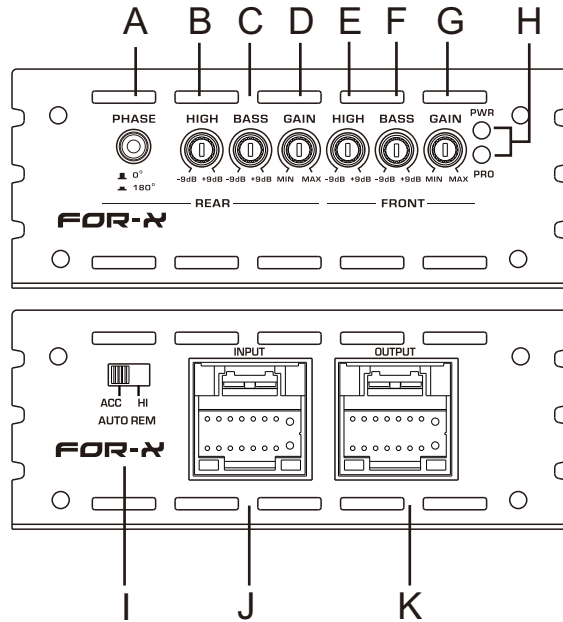

A. PHASE CONTROL

Use this switch to help compensate for time alignment problems in the system. Such problems usually result from having the subwoofer at a different distance from the listener than the other speakers in the system.

B. HIGH CONTROL

The boost feature will increase the sound level in the high frequencies of the rear sound field.

C. BASS CONTROL

The boost feature will increase the sound level in the bass frequencies of the rear sound field.

PANEL CONTROLS AND FEATURES

D. GAIN CONTROL

The gain control will match the amplifiers sensitivity to the rear sound field.

E. HIGH CONTROL

The boost feature will increase the sound level in the high frequencies of the front sound field.

F. BASS CONTROL

The boost feature will increase the sound level in the bass frequencies of the front sound field.

G. GAIN CONTROL

The gain control will match the amplifiers sensitivity to the front sound field.

H. POWER /PROTECT INDICATOR

These bi-color LED glows green when power is on and no problems are present. If one of the protection circuits comes on, it will change to red.

I. ACC/HI DIRECT START ON SWITCH

Depending on the selected switch, the amplifier can select ACC on or android audio power amplifier.

J. INPUT CONNECTION

K. OUTPUT CONNECTION