


**BuRock**  
BR-2.0

## USER MANUAL

**BR-2.0**  
2.5 INCH SPEAKER DRIVER

**BuRock**  
BR-2.0

### 1 Connection way

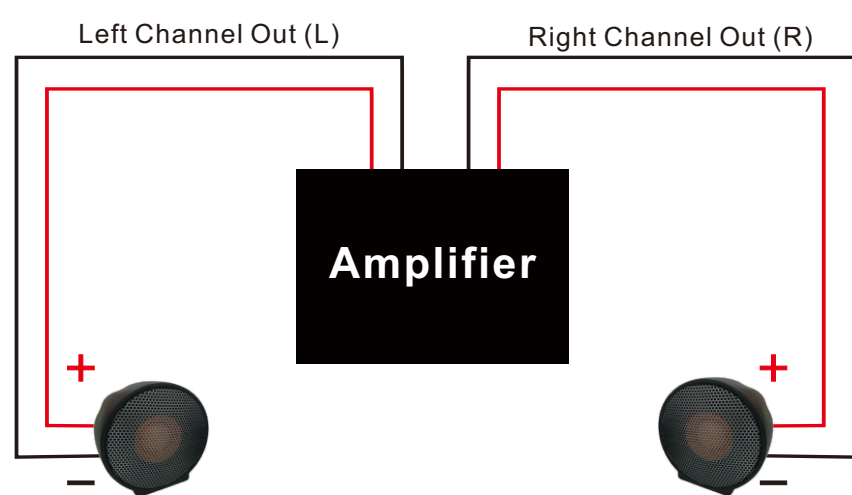

### 2 Tuning way

After connect well the mid-tweets with your amplifier, according to original car speaker sound, if original car loss tweeters, increase the HPF of this set of mid-tweets, make up for the lack of tweeter of the original car. On the other hand, if Middle is not enough, decrease the HPF of this set of mid-tweets.

For the mid-tweets volume, under the bass is matching with original car sound, it is better which the bass drum volume need to a little higher than the human voice background music.

### 3 Install Position

Install on the top of dashboard by velcro, make sure it is stable.



### 4 Specification

|                    |               |            |           |
|--------------------|---------------|------------|-----------|
| Impedance          | 4Ohms         | Max        | 150W      |
| Frequency Response | 110Hz~20000Hz | SPL        | 90dB      |
| Nom                | 50W           | Size       | 75mmx85mm |
|                    |               | Net Weight | 100g      |