

THANK YOU.



www.for-x.com.tr

Owner's Manual

XQ-22RC

Universal Bass Control



CE

SPECIFICATIONS

All specifications are measured at 14.4VDC (standard automotive voltage).

| | |
|----------------------------|------------|
| >Maximum output level | 5 V |
| > Input Sensitivity | 300mV-4V |
| >Frequency response | 10Hz-22kHz |
| >Total harmonic distortion | 0.1% |
| >Power supply | 11-15V |

CONGRATULATIONS

We would like to congratulate you on your purchase of the Universal Bass Control; a Two Channel , high-performance, Universal Bass Control.

This unique product will accept two channels of speaker-level signal from a factory-installed amplifier or source unit and convert it to a high quality, low-noise pre-amp signal. Therefore the Powered RCA Distributor will allow you to use your factory installed source unit but give you the ability to add a really good aftermarket amplifier and processor, Whether this is your first product or you are already a firm believer, you will definitely enjoy how great the Powered RCA Distributor can make your performance system sound.


Please read these instructions carefully before beginning to install your new Universal Bass Control. Proper installation and adequate tuning will help you to get optimal sound quality results.

FEATURES

Here are some of the cool features that your Universal Bass Control offers:

- >Universal Bass Control
- >Signal sensing inputs
- >Level matching controls
- >Remote output
- >Two Channel Output jacks.
- >Volt Display

FRONT PANEL CONTROLS

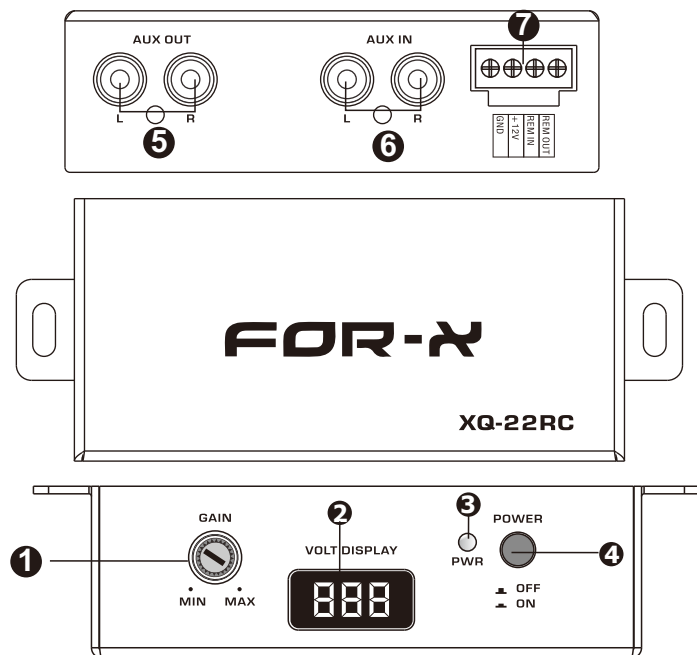

1. This Control adjusts the output Level.
2. This display indicate Volt Display.
3. Power LED indicate
4. Power input Selection Switch.
5. AUX Output RCA
6. AUX Input RCA
7. Connection Terminal

ELECTRICAL INSTALLATION

